

# FIREBIRD COAXPRESS

## 4XCXP-12 Frame Grabber


- CoaXPress v2.1 Frame Grabber Family
- Supports CoaXPress speeds up to CXP-12
- RISC based ActiveDMA engine technology
- PCI Express 3.0 (Gen3) 8-lane interface



### FEATURES

---

- CoaXPress gives high speed data, power, and camera control all over a single cable.
- High performance CXP 2.1 with up to 50 Gigabits per second input rate.
- Fast PCI Express 3.0 8-lane interfaces.
- ActiveDMA engine – acquisition with zero CPU usage.
- Comprehensive I/O including end bracket I/O.
- Supports PoCXP (Power over CoaXPress).
- HD-BNC (also known as Micro-BNC) connectors.
- Standard half-length PCI form-factor.
- Full GenICam support (including GenTL Producer).
- Supported by the proven ActiveSDK.

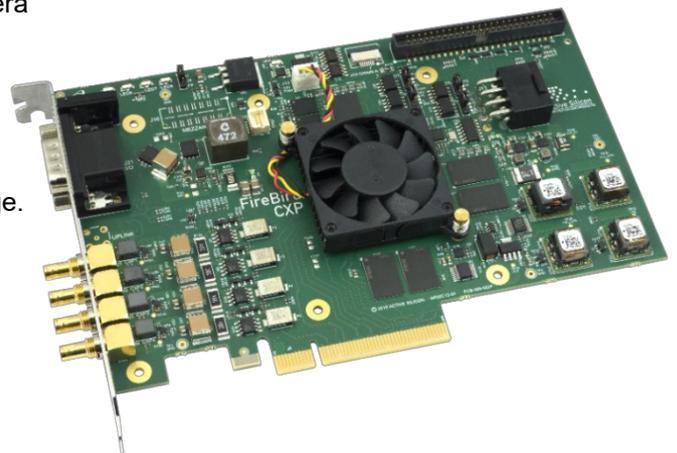

### OVERVIEW

---

**FireBird 4XCXP-12 3PE8 Frame Grabber** is the flagship product of Active Silicon's state-of-the-art FireBird frame grabber family.

**FireBird** is designed for ultimate performance using Active Silicon's proprietary DMA Engine technology, "ActiveDMA". This technical innovation applies RISC based processor techniques and guarantees high speed and low latency image data transfers and zero CPU intervention.

CoaXPress is a leading transmission standard for high-speed imaging in professional and industrial applications, which now includes the faster CXP-10 and CXP-12 speeds. Each CoaXPress connection supports up to 12.5 Gbps data rates, along with device power up to 13W and device control at up to 42 Mbps – all on a single coax cable. For faster devices, connections can be concatenated to provide multiples of the single coax bandwidth. Very long cable lengths are supported – up to 35m at 12.5 Gbps and 100m at 3.125 Gbps using Belden 1694A cable – or even longer lengths using thicker cables. Active Silicon was one of the primary authors of the international CoaXPress standard, which is hosted by the JIIA (Japan Industrial Imaging Association). All our CoaXPress products are certified compliant to the specification through the JIIA CoaXPress Product Certification Program.



**FireBird** is supported by Active Silicon's software development kit, ActiveSDK. This is available as a separate item and allows rapid system development and integration. It provides comprehensive example applications and optimized libraries, which support a variety of operating systems via a common API, including Windows and Linux (64-bit environments), contact Active Silicon for other OS support. Drivers for third party applications are also available such as Cognex VisionPro, HALCON, Common Vision Blox, StreamPix, LabVIEW etc.

Full GenICam support is included in the drivers and this includes a GenTL Producer for data streaming as well as register accesses. Additional to functions that control the hardware, the libraries include general purpose functions for the manipulation and display of images. A separate datasheet describes ActiveSDK in detail.

## SPECIFICATION SUMMARY

---

<i>CoaXPress Interface:</i>	Four 75 Ohm HD-BNC connectors (also known as Micro-BNC) each operate at all CXP speeds up to 12.5 Gbps. Up to 17W is available to power cameras on each Micro-BNC via Power over CoaXPress (PoCXP), with 13W available at the camera according to the CoaXPress specification. <b>FireBird</b> supports one camera using all four connections, two cameras each using two connections, or up to four cameras each using one connection. LEDs on the end bracket show the link status according to the CoaXPress specification.
<i>Buffer Memory:</i>	Up to 4 GBytes of DDR4 memory is fitted for buffering between the CoaXPress interface and the PCI Express bus.
<i>PCI Express:</i>	The PCIe 3.0 (Gen3) x8 interface to support up to 6.8 Gbytes/sec transfer from <b>FireBird</b> to the PC.
<i>I/O:</i>	The following I/O lines are provided for triggers, optical shaft encoders, exposure control and general I/O: <ul style="list-style-type: none"><li>• 4 opto-isolated inputs.</li><li>• 4 opto-isolated outputs.</li><li>• 4 TTL inputs, 5V tolerant.</li><li>• 4 TTL I/O, 5V logic.</li><li>• 4 RS-422 inputs.</li><li>• 4 RS-422 outputs.</li></ul> All these I/O signals are provided on a 50-way header on the <b>FireBird</b> board. A 15-way D-Type connector is located on the end bracket and allows access to a subset of the above I/O: <ul style="list-style-type: none"><li>• 2 opto-isolated inputs.</li><li>• 3 TTL I/O, 5V logic.</li><li>• 2 RS-422 inputs.</li><li>• 1 RS-422 output.</li></ul>
<i>Power Input:</i>	An 8-way PCI Express Graphics (PEG) connector is provided to connect to a 6 or 8-way PEG connector from the PC power supply. This is only needed for PoCXP.
<i>Fan Controller:</i>	The fan speed is linked to the temperature of the FPGA die for optimum cooling and noise level.

---



## CONFORMANCE

<i>PCI Express Interface:</i>	PCI Express Bus, eight-lane Gen3 interface to Specification Revision 3.1, with a max payload size of 512 bytes. <b>FireBird 4XCXP-12 3PE8</b> supports both Short (32-bit) and Long (64-bit) Address packets. It also generates Posted Writes for image data, thus achieving transfer rates up to 6.8 Gbytes/sec, subject to host performance.
<i>CoaXPress:</i>	<b>FireBird 4XCXP-12 3PE8</b> conforms to v2.1 of the CoaXPress specification.
<i>Approvals:</i>	EU      CE mark for compliance with EMC EN 55022:2010 (class A) and EN 55024:2010 in accordance with EU directive 2014/30/EU. RoHS compliance to RoHS3 directive 2015/863/EU. USA     EMC FCC Class A. The printed circuit board is manufactured by UL recognised manufacturers and has a flammability rating of 94V-0.

## PHYSICAL AND ENVIRONMENTAL DETAILS

<i>Dimensions:</i>	PCB:     168mm by 111mm. Overall: 181mm by 111mm.
<i>Approximate weight:</i>	190g.
<i>Power consumption (typical):</i>	+3.3 V    +12 V    +12V PEG Connector
<i>(3PE8, measured while acquiring from 4 CXP-6 connections)</i>	80mA     1220mA    Up to 68W for PoCXP
<i>(3PE8, measured while acquiring from 2 CXP-12 connections)</i>	80mA     990mA     Up to 34W for PoCXP
<i>(3PE8, measured while acquiring from 4 CXP-12 connections)</i>	80mA     1220mA    Up to 68W for PoCXP
<i>Storage Temperature:</i>	-15°C to +85°C.
<i>Operating Temperature:</i>	0°C to +60°C (ambient environment).
<i>Relative Humidity:</i>	10% to 90% non-condensing (operating and storage).



## ORDERING INFORMATION

---

<b>PART NUMBER</b>	<b>DESCRIPTION</b>
<b>AS-FBD-4XCXP12-3PE8</b>	FireBird 4XCXP-12 frame grabber with 8-lane PCIe 3.1 (Gen3) interface, supporting: <ul style="list-style-type: none"><li>• One quad-connection camera up to CXP-12</li><li>• Two dual-connection cameras up to CXP-12</li><li>• Four single-connection cameras up to CXP-12</li></ul>
<b>Software Solutions</b>	
<b>AS-ACTIVESDK-WIN</b>	Software Development Kit for <i>Windows</i> operating system.
<b>AS-ACTIVESDK-LIN</b>	Software Development Kit for <i>Linux</i> operating system.
<b>CoaXPress Cable Solutions</b>	
<b>AS-CBL-1MM-0010-xM</b>	HD-BNC (micro-BNC) to HD-BNC cable x metres in length for use with CoaXPress video sources. Made from Belden 4855R cable rated to CXP-12. The standard stock length is 3m. High-flex rating and much longer length cables also available – contact your distributor for details.
<b>AS-CBL-1BM-0010-xM</b>	As above, but HD-BNC to BNC.
<b>AS-CBL-1DM-0001-xM</b>	As above, but HD-BNC to DIN1.0/2.3 and made from Belden 1855A cable rated to CXP-6 (DIN connectors are only supported in CXP up to CXP-6 speeds).

## THE FIREBIRD RANGE

---

The following products are also available in the range:

- High performance CoaXPress CXP-12 and CXP-6 frame grabbers in single, dual and quad configurations.
- Optical link solutions with CoaXPress over Fiber.
- Camera Link frame grabbers in Dual Base, Medium, Full and 80-bit (Deca) configurations.

## THE ONCILLA RANGE

---

Oncilla Machine Vision Solutions can provide a full vision solution for CoaXPress interfaces:

- Oncilla Machine Vision Computer – CoaXPress. A machine vision Industrial PC system with a 4XCXP-3PE8 frame grabber installed.



## CONTACT DETAILS

---

*Headquarters:*

Active Silicon Ltd  
1 Waterside Court, Waterside Drive,  
Langley, Berks, SL3 6EZ, UK.

Tel: +44 (0)1753 650600  
Email: [info@activesilicon.com](mailto:info@activesilicon.com)  
Website: [www.activesilicon.com](http://www.activesilicon.com)

*North America:*

Active Silicon, Inc.  
479 Jumpers Hole Road, Suite 301,  
Severna Park, MD 21146, USA.

Tel: +1 410-696-7642  
Email: [info@activesilicon.com](mailto:info@activesilicon.com)  
Website: [www.activesilicon.com](http://www.activesilicon.com)

28-Nov-2024