

FIREBIRD COAXPRESS


Quad CXP-12 Frame Grabbers

- CoaXPress v2.1 Frame Grabber Family
- Supports CoaXPress speeds up to CXP-12
- RISC based ActiveDMA engine technology
- PCI Express 3.0 (Gen3) 4-lane and 8-lane options



FEATURES

- CoaXPress gives high speed data, power, and camera control all over a single cable.
- High performance CXP 2.1 with up to 50 Gigabits per second input rate.
- Fast PCI Express 3.0 4-lane and 8-lane interfaces.
- ActiveDMA engine – acquisition with zero CPU usage.
- Comprehensive I/O including end bracket I/O.
- Supports PoCXP (Power over CoaXPress).
- HD-BNC (also known as Micro-BNC) connectors.
- Standard half-length PCI form-factor.
- Full GenICam support (including GenTL Producer).
- Supported by the proven ActiveSDK.

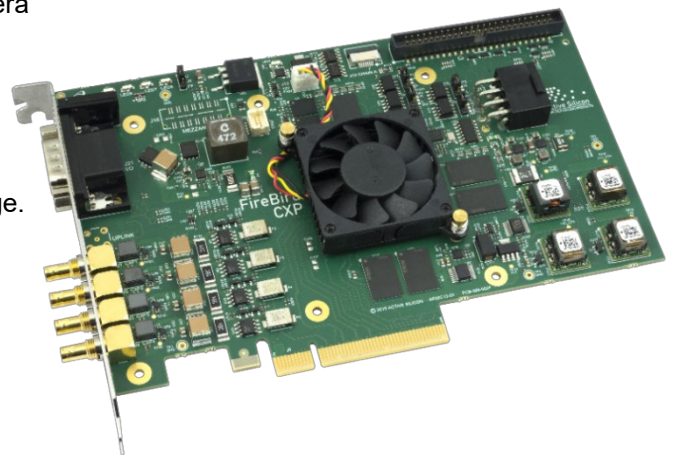

OVERVIEW

FireBird CXP-12 products are the flagship products of Active Silicon's state-of-the-art FireBird frame grabber family.

FireBird is designed for ultimate performance using Active Silicon's proprietary DMA Engine technology, "ActiveDMA". This technical innovation applies RISC based processor techniques and guarantees high speed and low latency image data transfers and zero CPU intervention.

CoaXPress is a leading transmission standard for high-speed imaging in professional and industrial applications, which now includes the faster CXP-10 and CXP-12 speeds. Each CoaXPress connection supports up to 12.5 Gbps data rates, along with device power up to 13W and device control at up to 42 Mbps – all on a single coax cable. For faster devices, connections can be concatenated to provide multiples of the single coax bandwidth. Very long cable lengths are supported – up to 35m at 12.5 Gbps and 100m at 3.125 Gbps using Belden 1694A cable – or even longer lengths using thicker cables. Active Silicon was one of the primary authors of the international CoaXPress standard, which is hosted by the JIIA (Japan Industrial Imaging Association). All our CoaXPress products are certified compliant to the specification through the JIIA CoaXPress Product Certification Program.



FireBird is supported by Active Silicon's software development kit, ActiveSDK. This is available as a separate item and allows rapid system development and integration. It provides comprehensive example applications and optimized libraries, and supports a variety of operating systems via a common API, including Windows, Linux (64-bit environments) and QNX. Drivers for third party applications are also available such as Cognex VisionPro, HALCON, Common Vision Blox, StreamPix, LabVIEW etc.

Full GenICam support is included in the drivers and this includes a GenTL Producer for data streaming as well as register accesses. Additional to functions that control the hardware, the libraries include general purpose functions for the manipulation and display of images. A separate datasheet describes ActiveSDK in detail.

SPECIFICATION SUMMARY

<i>CoaXPress Interface:</i>	<p>Four 75 Ohm HD-BNC connectors (also known as Micro-BNC) each operate at all CXP speeds up to 12.5 Gbps. Up to 17W is available to power cameras on each Micro-BNC via Power over CoaXPress (PoCXP), with 13W available at the camera according to the CoaXPress specification.</p> <p>FireBird supports one camera using all four connections, two cameras each using two connections, or up to four cameras each using one connection.</p> <p>LEDs on the end bracket show the link status according to the CoaXPress specification.</p>
<i>Buffer Memory:</i>	<p>Up to 4 GBytes of DDR4 memory is fitted for buffering between the CoaXPress interface and the PCI Express bus.</p>
<i>PCI Express:</i>	<p>Options for a four-lane or eight-lane PCIe 3.0 (Gen3) interface to support up to 6.8 Gbytes/sec transfer from FireBird to the PC. See the ordering information for more details.</p>
<i>I/O:</i>	<p>The following I/O lines are provided for triggers, optical shaft encoders, exposure control and general I/O:</p> <ul style="list-style-type: none">• 4 opto-isolated inputs.• 4 opto-isolated outputs.• 4 TTL inputs, 5V tolerant.• 4 TTL I/O, 5V logic.• 4 RS-422 inputs.• 4 RS-422 outputs. <p>All these I/O signals are provided on a 50-way header on the FireBird board.</p> <p>A 15-way D-Type connector is located on the end bracket and allows access to a subset of the above I/O:</p> <ul style="list-style-type: none">• 2 opto-isolated inputs.• 3 TTL I/O, 5V logic.• 2 RS-422 inputs.• 1 RS-422 output.
<i>Power Input:</i>	<p>An 8-way PCI Express Graphics (PEG) connector is provided to connect to a 6 or 8-way PEG connector from the PC power supply. This is only needed for PoCXP.</p>
<i>Fan Controller:</i>	<p>The fan speed is linked to the temperature of the FPGA die for optimum cooling and noise level.</p>



CONFORMANCE

<i>PCI Express Interface:</i>	PCI Express Bus four or eight lane Gen3 interface to Specification Revision 3.1, with a max payload size of 512 bytes. FireBird Quad CXP-12 supports both Short (32-bit) and Long (64-bit) Address packets. It also generates Posted Writes for image data, thus achieving transfer rates up to 6.8 Gbytes/sec, subject to host performance.		
<i>CoaXPress:</i>	FireBird Quad CXP-12 conforms to v2.1 of the CoaXPress specification.		
<i>Approvals:</i>	EU	CE mark for compliance with EMC EN 55022:2010 (class A) and EN 55024:2010 in accordance with EU directive 2014/30/EU. RoHS compliance to RoHS3 directive 2015/863/EU.	
	USA	EMC FCC Class A. The printed circuit board is manufactured by UL recognised manufacturers and has a flammability rating of 94V-0.	

PHYSICAL AND ENVIRONMENTAL DETAILS

<i>Dimensions:</i>	PCB:	168mm by 111mm.	
	Overall:	181mm by 111mm.	
<i>Approximate weight:</i>	190g.		
<i>Power consumption (typical):</i>	+3.3 V	+12 V	+12V PEG Connector
<i>(3PE4, measured while acquiring from 4 CXP-6 connections)</i>	80mA	940mA	Up to 68W for PoCXP
<i>(3PE4, measured while acquiring from 2 CXP-12 connections)</i>	80mA	990mA	Up to 34W for PoCXP
<i>(3PE8, measured while acquiring from 4 CXP-12 connections)</i>	80mA	1220mA	Up to 68W for PoCXP
<i>Storage Temperature:</i>	-15°C to +85°C.		
<i>Operating Temperature:</i>	0°C to +60°C (ambient environment).		
<i>Relative Humidity:</i>	10% to 90% non-condensing (operating and storage).		



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AS-FBD-4XCXP12-3PE8	FireBird Quad CXP-12 frame grabber with eight lane Gen3 interface, supporting: <ul style="list-style-type: none">• One quad-connection camera up to CXP-12• Two dual-connection cameras up to CXP-12• Four single-connection cameras up to CXP-12
AS-FBD-4XCXP12-3PE4	FireBird Quad CXP-12 frame grabber with four lane Gen3 interface, supporting: <ul style="list-style-type: none">• One dual-connection camera up to CXP-12 (*)• Two single-connection cameras up to CXP-12 (*)• One quad-connection camera up to CXP-6• Two dual-connection cameras up to CXP-6• Four single-connection cameras up to CXP-6 (*) more CXP-12 cameras may be connected, but the numbers stated above can simultaneously stream data.
AS-ACTIVESDK-xxx	Software Development Kit for xxx operating system. For a full list of all supported operating systems please refer to the ActiveSDK datasheet or contact your distributor.
AS-CBL-1MM-0010-xM	HD-BNC (micro-BNC) to HD-BNC cable x metres in length for use with CoaXPress video sources. Made from Belden 4855R cable rated to CXP-12. The standard stock length is 3m. High-flex rating and much longer length cables also available – contact your distributor for details.
AS-CBL-1BM-0010-xM	As above, but HD-BNC to BNC.
AS-CBL-1DM-0001-xM	As above, but HD-BNC to DIN1.0/2.3 and made from Belden 1855A cable rated to CXP-6 (DIN connectors are only supported in CXP up to CXP-6 speeds).

THE FIREBIRD RANGE

The following products are also available in the range:

- High performance CoaXPress CXP-12 and CXP-6 frame grabbers in single, dual and quad configurations.
- Camera Link frame grabbers in Base, Medium, Full and 80-bit (Deca) configurations.



CONTACT DETAILS

Headquarters:

Active Silicon Ltd
1 Waterside Court, Waterside Drive,
Langley, Berks, SL3 6EZ, UK.

Tel: +44 (0)1753 650600
Email: info@activesilicon.com
Website: www.activesilicon.com

North America:

Active Silicon, Inc.
479 Jumpers Hole Road, Suite 301,
Severna Park, MD 21146, USA.

Tel: +1 410-696-7642
Email: info@activesilicon.com
Website: www.activesilicon.com

14-Jul-2024