Active Silicon
COMPUTER IMAGING PRODUCTS
A SOLID STATE PLC GROUP COMPANY

Oriole HD-SDI Board Camera

(HD-SDI/EX-SDI/CVBS)

AS-BCAM-S32-00-B

Technical Reference Manual

Edition: v1.05

Issued Date: 01 September 2023

Contents

FEATURES 3
CAUTIONS 4
SPECIFICATION 5
CONNECTORS 7
BLOCK DIAGRAM 9
PROTOCOL 10
VISCA COMMAND LIST 14
VISCA INQUIRY COMMAND LIST 18
OSD MENU 24
CAMERA DIMENSIONS 33
APPROVALS 33
ORDERING INFORMATION 34
CONTACT DETAILS 34

Features

◆ **1/3“ CMOS sensor**
2.5M Pixels(Total) / 2.3M Pixels(Active)

◆ **Full HD Resolution**
1920x1080p / 30fps(25fps)
1280x720p / 30fps(25fps)
1280x720p / 60fps(50fps)

◆ **DAY & NIGHT** (optional function)
AS-BCAM-S32-00-B uses a DC Motor controller to drive a switchable IR-cut filter for day and night mode functionality. The filter state can be changed between day and night depending on the luminance level. It can be also controlled by the external Day and Night port.

◆ **WDR (Wide Dynamic Range)**
WDR applies an optimum fusion ratio when combining the high-speed shutter used in bright areas and the low-speed shutter used in dark areas.

◆ **DNR (Digital Noise Reduction, 2D+3D)**
The DNR technology eliminates noise thus generating a distinct and clear image. This camera DNR function utilizes both an adaptive 2D filter reducing noise in the brightness of the image and an adaptive 3D filter reducing noise caused by movement.

◆ **Privacy Mask Function**
The privacy zone function makes it possible to mask specific areas of the scene from view.

◆ **On Screen Display**
The camera can be controlled by selecting menu text displayed on the video output.

◆ **Intelligent motion detection**
Can transmit an alert signal when motion of an object on the screen is detected. This feature is useful when you have to monitor several screens simultaneously.

◆ **Output**
Digital output: HD-SDI, EX-SDI
Analog output: NTSC, PAL Composite (without WDR)

◆ **Protocol**
The camera can be controlled by the VISCA, PELCO-D and PELCO-P serial communications protocols.

Cautions

◆ Power Supply

This camera must always be operated at 12V DC

◆ Handling of the unit

Be careful not to spill water or other liquids on the unit.

◆ Operating and storage location

Avoid viewing a very bright object (such as light fittings) during an extended period. Avoid operating or storing the unit in the following locations.

- Extremely hot or cold places (operating temperature -10 °C ~ 50 °C, however, we recommend that the unit be used within a temperature range of 0 °C ~ 45 °C)
- Damp or dusty places
- Places exposed to rain
- Places subject to strong vibration
- Close to generators of powerful electromagnetic radiation such as radio or TV transmitters.

◆ Care of the unit

- Remove dust or dirt on the surface of the CMOS sensor with a blower (commercially available).
- Avoid the use of volatile solvents such as thinners, alcohol, benzene and insecticides. They may damage the surface finish and/or impair the operation of the camera.

Specification

Model	AS-BCAM-S32-00-B
Image Sensor	1/3" 2MP Nuvoton (Panasonic) MN34422 CMOS sensor
Total Pixels	1,981(H) x 1,288(V) = 2.55M Pixels
Effective pixels	1,944(H) x 1,212(V), 2.35M Pixels
Scanning system	Progressive Scan
Video modes	Digital: 1080p/30(25)fps, 720p/60(50)fps, 720p/30(25)fps Analog: 700TVL
Minimum illumination	Color(1/30s) : 0.03lux , BW(1/30s) : 0.004lux Color DSS(1/8s) : 0.0075ux , BW DSS(1/8s) : 0.001lux
Video Output	HD: HD-SDI / EX-SDI Analog SD: VBS (without WDR)
Function	
Model	D&N / IR-CDS (external sensor) – can only be set by OSD menu
Exposure	
Lens	Normal / Deblur
Brightness	0 ~ 20 steps
Shutter Speed	Auto / Manual 1/30(1/25) ~ 1/30,000 sec
Digital Slow Shutter (DSS)	Off / x2 / x4 (/ x8: 60 or 50 fps mode only)
Gain Control (AGC)	Off / On
Flickerless	Off / On
WDR/BLC	OFF / WDR / BLC
Day&Night	Auto / Day / Night / Ext
White Balance	Auto / One Push / Manual / Indoor / Outdoor
Image	
HLC	Off / On / Night Only
DNR	Auto / Off / Low / Middle / High
Mirror	Off / H / V / H&V
Sharpness	0 ~ 10 steps
ACE	Off / Low / Middle / High (Adaptive Contrast Enhancement)
Defog	Off / On (Auto / Manual)
Freeze	Off / On
Gamma	0.45 / 0.55 / 0.65 / 0.75
Digital Zoom	x2 ~ x32

Model	AS-BCAM-S32-00-A / -B
Intelligence	Privacy / Motion / DIS
Privacy Mask	Off / On (24 masks)
Motion Detection	Off / On (3 positions)
Digital Image Stabilizer	Off / On
Special Function	Defect / Image Range / System / HD Format / EX-SDI / COMM
Defect Det.	Off / On
Image Range	Full / Comp. / User
System	NTSC / PAL
HD Format	1080p/30(25)fps / 720p/30(25)fps / 720p/60(50)fps
EX-SDI	Off / On
Communication	ID: 1 ~ 255
	Baud Rate: 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200
	Protocol: Pelco-P / Pelco-D / VISCA
Display	Disp Sel / Set Title / Init Sel / Set Init Msg / Language
Disp Sel (Off / On)	ID / Title / Zoom Ratio / System Message
Set Title	Text Edit
Init Sel (Off / On)	ID / Baud Rate / Protocol / Version / Init. Message
Set Init Msg	Text Edit
Language	English / Simplified Chinese / Traditional Chinese / Japanese
Electrical	
Power Source	12V±10% DC
Power Consumption	250mA
General	
Power Input	Header Connector
Video Output	SDI/EX-SDI MMCX Connector
Operating Temperature	-10°C ~ +50°C (Humidity: 0%RH ~ 90%RH)
Storage Temperature	-20°C ~ +60°C (Humidity: 0%RH ~ 90%RH)
Dimension (mm)	32(L) x 32(W) x 10(H) mm (not including lens or mount) 32(L) x 38(W) x 31(H) mm (with lens, lens mount, IR-cut filter)

Connectors

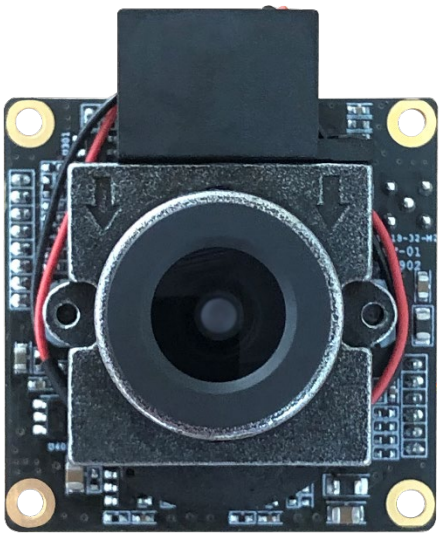

Top View

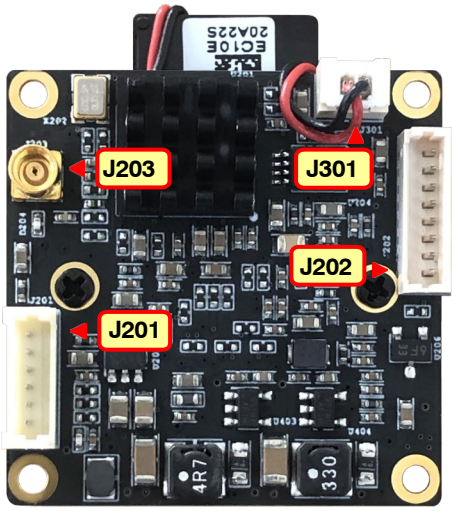

Bottom View

J201 (I/O Connector)					
Pin No.	**Name**	**Level**	**Pin No.**	**Name**	**Level**
1	DC+12V In		4	ADKEY	See ADKEY section
2	GND		5	D&N-IN (Active High)	Day&Night Control i/p Night input: 0V (GND) Day input: +3.3V
3	VBS Out		6	IR-ON	Night output: +3.3V Day output: 0V (GND)
12512WS-06 (YEONHO)					

J202 (Connector for upgrading Camera Firmware)					
Pin No.	**Name**	**Level**	**Pin No.**	**Name**	**Level**
1	JMODE JT=JTAG Upgrade	J Mode Setting Normal: 3.3V Active 0V	5	JTMS	JT Chip Selector
2	JTCK	JT Clock	6	GND	
3	JTDI	JT Data In	7	RXD	UART In
4	JTDO	JT Data Out	8	TXD	UART Out
53047-08 (MOLEX)					

J203 (HD-SDI Connector)			**J301** (Day&Night Motor Control Drive)		
Pin No.	**Name**	**Level**	**Pin No.**	**Name**	**Level**
1	SDO	HD-SDI Output	1	CONT(+)	Day: 0V (GND) Night: 5V
2	GND		2	CONT(-)	Day: 5V Night: 0V (GND)
RF Connector - MMCX			12512WS-02 (YEONHO)		

1. D&N IN (J201-5)

Port for input of external signal in Day&Night “Ext-In” Mode (active high polarity)

- Day Mode: High (+3.3V)
- Night Mode: Low (Ground)

The polarity of this signal can be reversed using the OSD menu Polarity option (Exposure -> DAY&NIGHT).

2. AD KEY (J201-4)

The external wired remote controller connector.

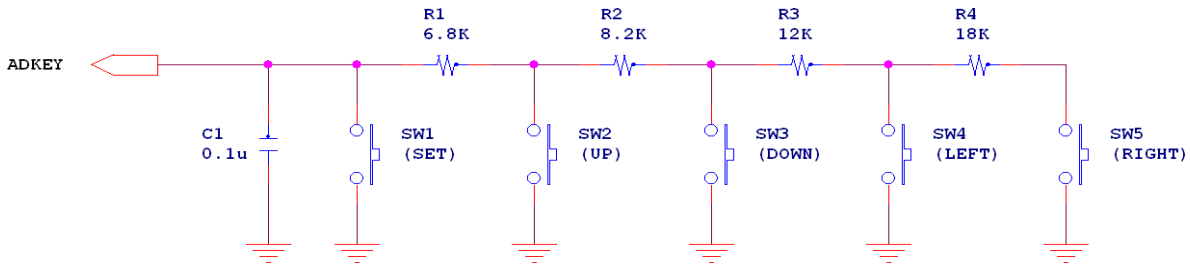

Block Diagram

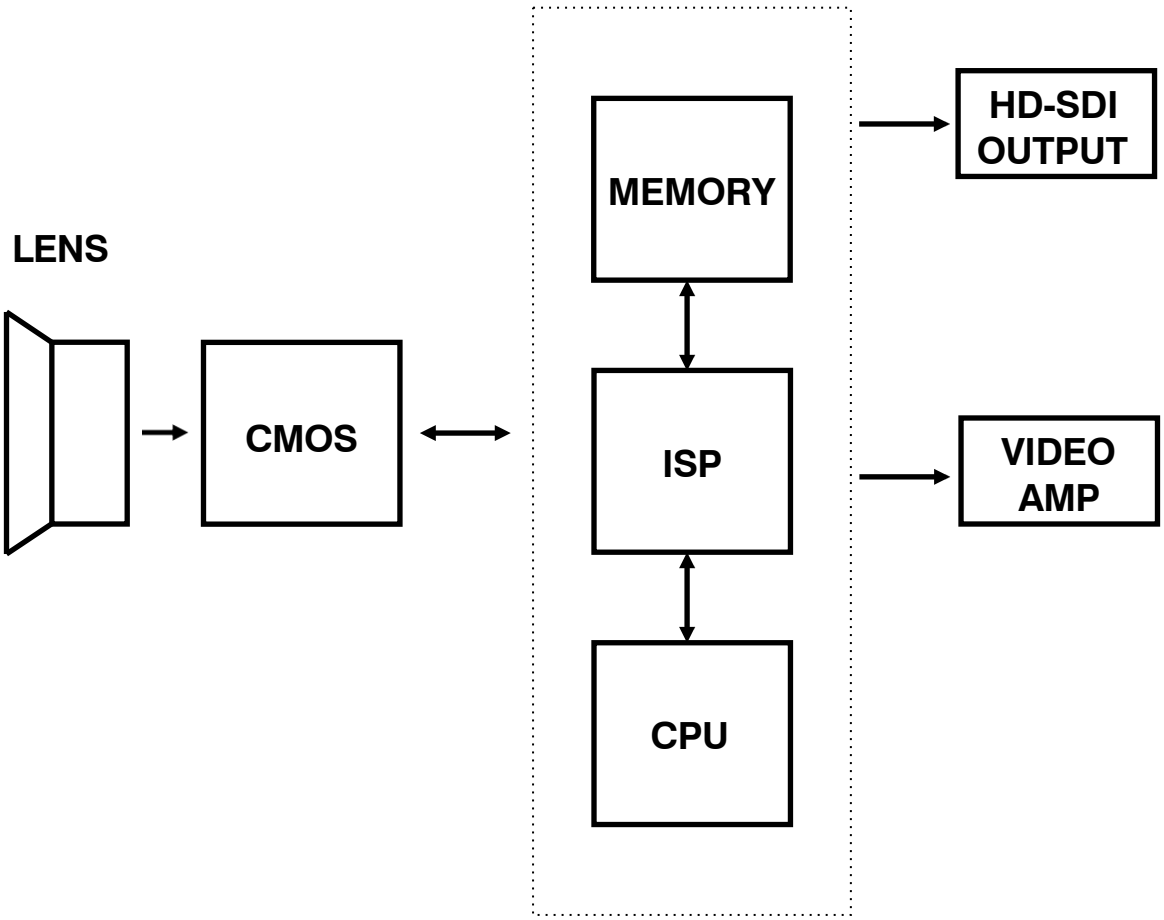

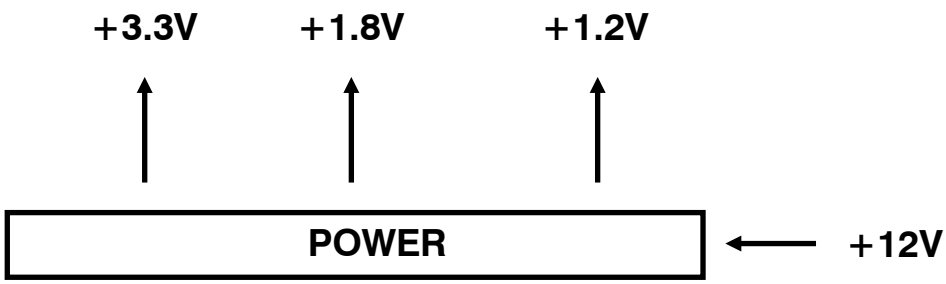

Protocol

1. Timing

As Command processing can only be carried out one time in a Vertical cycle, it takes the maximum 1V cycle time for an ACK/Completion to be returned. If the Command ACK/Completion communication time can be cut shorter than the 1V cycle time, then every 1V cycle can receive a Command.

※ 1V cycle

- 30fps mode: 33.3ms
- 60fps mode: 16.7ms
- 25fps mode: 40.0ms
- 50fps mode: 20.0ms

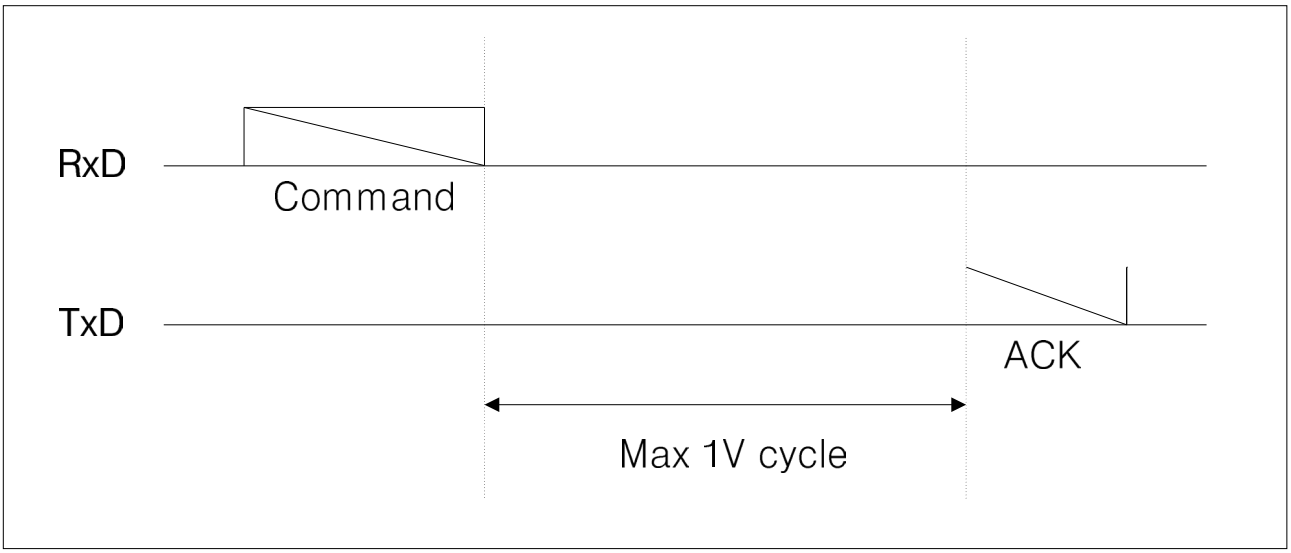

2. Communication parameter

- Protocol: VISCA, Pelco-D, Pelco-P
- ID: 1~7 (VISCA), 1~255 (Pelco-D, Pelco-P)
- Baud rate: 2400, 4800, 9600, 19200, 38400, 57600, 115200 bps
- Data bit: 8
- Start bit: 1
- Stop bit: 1
- Non parity bit

3. Pelco-D Protocol Command List

Function	Message Format (Hex)						
	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7
Zoom Tele	FF	ID	00	20	00	00	CS
Zoom Wide	FF	ID	00	40	00	00	CS
Stop	FF	ID	00	00	Don't care		CS
Menu (Set)	FF	ID	00	03 or 07	00	5F	CS
Esc	FF	ID	00	03 or 07	00	60	CS
Up	FF	ID	00	08	00	XX	CS
Down	FF	ID	00	10	00	XX	CS
Left	FF	ID	00	04	XX	00	CS
Right	FF	ID	00	02	XX	00	CS

- ID: Camera ID (1 ~ 255)
- XX: Speed (10h < XX ≤ 40h)
- CS (Check Sum): An 8bit sum of byte 2 ~ 6 in the message.

4. Pelco-P Protocol Command List

Function	Message format (Hex)							
	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte8
Zoom Tele	A0	ID	00	20	00	00	AF	CS
Zoom Wide	A0	ID	00	40	00	00	AF	CS
Stop	A0	ID	00	00	Don't care		AF	CS
Menu (Set)	A0	ID	00	03 or 07	00	5F	AF	CS
Esc	A0	ID	00	03 or 07	00	60	AF	CS
Up	A0	ID	00	08	00	XX	AF	CS
Down	A0	ID	00	10	00	XX	AF	CS
Left	A0	ID	00	04	XX	00	AF	CS
Right	A0	ID	00	02	XX	00	AF	CS

- ID: Camera ID (1 ~ 255)
- XX: Speed (10h < XX ≤ 40h)
- CS(Check Sum): An XOR sum of byte 1 ~ 7 in the message.

5. Visca Protocol

- Command packet (Variable packet length)

Byte 0	Byte 1	Byte 2		…		Byte n-2	Byte n-1
Header	Message						Terminator
8Xh	QQ			…			FFh

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
1	0	0	0	0	×	×	×
	Sender's address				Receiver's address		

- X: 1 ~ 7 (Camera address)
- QQ: 01 (Command), 09 (Inquiry)

- Ack message packet (Variable packet length)

Byte 0	Byte 1	Byte 2		…		Byte n-2	Byte n-1
Header	Message						Terminator
Y0h	QR			…			FFh

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
1	y	y	y	0	0	0	0
	Sender's address				Receiver's address		

- Y: 9 ~ F (Camera address + 8)
- Q: 4 (Receive Ack), 5 (Completion message), 6 (Error message)
- R: Socket Number (1 ~ 3)

※ When command messages are sent to the camera, it is normal to send the next command message after waiting for the completion message or error message to return. However, to deal with advanced uses, the camera has three buffers (memories) for commands, so that up to three commands including the commands currently being executed can be received. When the camera receives commands, it notifies the sender which command buffer was used using the socket number of the ACK message.

Ack type	Reply packet
Recevie Ack	Y0 4R FF
Compeletion (Commands)	Y0 5R FF
Compeletion (Inquiries)	Y0 50 … FF
Error	Y0 6R SS FF

SS	Description
01	Message length error
02	Syntax error
03	Command buffer full
04	Command cancelled
05	No socket (to be cancelled)
41	Command not executable

- Example of communication
  - Camera ID: 1
  - Socket number: 1

※ Command

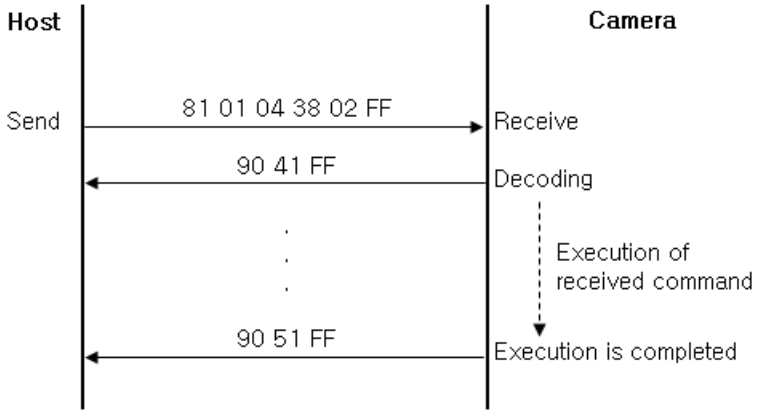

※ Inquiry command

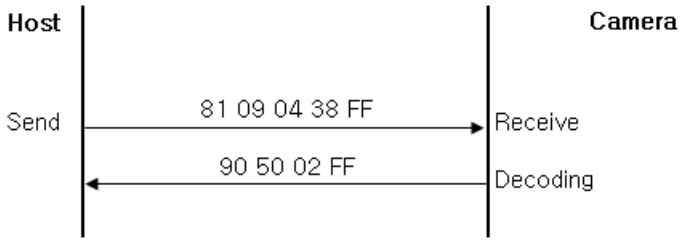

- Network change message
  - Sent from the peripheral device to the controller when a device is removed from or added to the network. The address must be re-set when this message is received:

    Y0 38 FF

    – Y: 9 ~ F (Camera address + 8)

VISCA Command List

Command Set	Command	Command Packet	Comments
AddressSet	Broadcast	88 30 01 FF	Address setting
IF_Clear	Broadcast	88 01 00 01 FF	I/F Clear
		8x 01 00 01 FF	
CommandCancel		8x 2p FF	p : Socket No.(1 ~ 3)
CAM_Power	Power Reset	8x 01 04 00 03 FF	Camera Rebooting
CAM_DZoom	On	8x 01 04 06 02 FF	Digital Zoom ON/OFF
	Off	8x 01 04 06 03 FF	
	Stop	8x 01 04 06 00 FF	
	Tele (Variable)	8x 01 04 06 2p FF	p : 0(Slow) ~ 7(Fast)
	Wide (Variable)	8x 01 04 06 3p FF	
	x1/Max	8x 01 04 06 10 FF	x1/Max Magnification switchover
	Direct	8x 01 04 46 00 00 0p 0q FF	pq : D-Zoom Position
CAM_Initialize	Comp Scan	8x 01 04 19 02 FF	Execute White spot compensation
	Comp Scan Thrs	8x 01 04 19 03 00 0p 0q FF	pq : Threshold of White spot compensation
CAM_WB	Auto	8x 01 04 35 00 FF	Normal Auto
	Indoor	8x 01 04 35 01 FF	Indoor Mode
	Outdoor	8x 01 04 35 02 FF	Outdoor Mode
	One Push AWB	8x 01 04 35 03 FF	One Push AWB Mode
	Manual	8x 01 04 35 05 FF	Manual Control Mode
	One Push Trigger	8x 01 04 10 05 FF	One Push AWB trigger
CAM_Rgain	Reset	8x 01 04 03 00 FF	R Gain Manual setting
	Up	8x 01 04 03 02 FF	
	Down	8x 01 04 03 03 FF	
	Direct	8x 01 04 43 00 00 0p 0q FF	pq : R Gain(0~14h)
CAM_Bgain	Reset	8x 01 04 04 00 FF	B Gain Manual setting
	Up	8x 01 04 04 02 FF	
	Down	8x 01 04 04 03 FF	
	Direct	8x 01 04 44 00 00 0p 0q FF	pq : B Gain(0~14h)
CAM_Chroma	Direct	8x 01 04 13 00 00 0p 0q FF	pq : Chroma level (0~14h)
CAM_LENS	Mode	8x 01 04 49 01 0p 00 FF	p : Lens Mode (0:Normal, 1:Deblur)
CAM_ShutterMode	Auto	8x 01 04 39 00 FF	Auto exposure mode
	Manual	8x 01 04 39 03 FF	Manual control mode
CAM_Shutter	Reset	8x 01 04 0A 00 FF	Shutter setting
	Up	8x 01 04 0A 02 FF	
	Down	8x 01 04 0A 03 FF	
	Direct	8x 01 04 4A 00 00 0p 0q FF	pq : Shutter Position
CAM_AGC	On	8x 01 04 5C 02 FF	AGC Mode
	Off	8x 01 04 5C 03 FF	
CAM_SlowShutter	Auto (On)	8x 01 04 5A 02 FF	Auto Slow Shutter ON/OFF
	Manual (Off)	8x 01 04 5A 03 FF	
CAM_MaxDSSLev	Direct	8x 01 04 5A 1p FF	p :Max Slow shutter level (0:x2, 1:x4, 2:x8) ※ You can't select “x8” in 30 or 25 fps mode
CAM_ExpComp	On	8x 01 04 3E 02 FF	Exposure Compensation ON/OFF
	Off	8x 01 04 3E 03 FF	
	Reset	8x 01 04 0E 00 FF	Exposure Compensation amount setting
	Up	8x 01 04 0E 02 FF	
	Down	8x 01 04 0E 03 FF	
	Direct	8x 01 04 4E 00 00 0p 0q FF	pq : ExpComp Position (0 ~ 14h)

Command Set	Command	Command Packet	Comments
CAM_Flickerless	On	8x 01 04 7A 02 FF	Flickerless ON/OFF
	Off	8x 01 04 7A 03 FF	
CAM_BLC	On	8x 01 04 33 02 FF	Back Light Compensation
	Off	8x 01 04 33 03 FF	
CAM_BLCFunc	Area OSD Display	8x 01 04 3C 0p FF	p : 0(Area OSD Off), 1(Area OSD On)
	Area Start X	8x 01 04 3C 10 00 0p 0q FF	pq : Start Horizontal Position (0 ~ 36h)
	Area Start Y	8x 01 04 3C 20 00 0p 0q FF	pq : Start Vertical Position (0 ~ 3Ch)
	Area End X	8x 01 04 3C 30 00 0p 0q FF	pq : End Horizontal Position (4~3Ah)
	Area End Y	8x 01 04 3C 40 00 0p 0q FF	pq : End Vertical Position (4~40h)
CAM_HLC	Mode	8x 01 04 32 0p FF	p : HLC Mode - 0(Off), 1(On), 2(Night)
	Level	8x 01 04 32 10 00 0p 0q FF	pq : HLC Level (0~14h)
	Clip Color	8x 01 04 32 3p FF	p : HLC Color - 0 ~ Dh (0:BLK, 1~6:Gray1~6, 7:WHT, 8:RED, 9:GRN, Ah:BLU, Bh:CYN, Ch:YEL, Dh:MAG)
CAM_WD	On	8x 01 04 3D 02 FF	Wide-D ON/OFF
	Off	8x 01 04 3D 03 FF	
CAM_WD_Level	Direct	8x 01 04 7D 0p FF	p : WDR Level (0 ~ 4)
CAM_ACE	On	8x 01 04 1A 02 FF	ACE ON/OFF
	Off	8x 01 04 1A 03 FF	
CAM_ACELevel	Direct	8x 01 04 1A 10 0p FF	p : ACE Level (0 ~ 2)
CAM_Defog	On	8x 01 04 65 02 FF	Defog ON/OFF
	Off	8x 01 04 65 03 FF	
	Level	8x 01 04 65 10 0p FF	p : Defog Level(0 ~ 2)
	Mode	8x 01 04 65 20 0p FF	p : 0(Manual), 1(Auto)
CAM_DNR	Mode	8x 01 04 53 0p FF	p : 0 (Off), 1 ~ 3 (Manual Level), 4 (Auto)
CAM_GAMMA	Direct	8x 01 04 5B 0p FF	p: Gamma setting (0:0.45, 1:0.55, 2:0.65, 3:0.75)
CAM_Aperture	Reset	8x 01 04 02 00 FF	Aperture Control
	Up	8x 01 04 02 02 FF	
	Down	8x 01 04 02 03 FF	
	Direct	8x 01 04 42 00 00 0p 0q FF	pq : Aperture Gain (0~Ah)
CAM_LR_Reverse	On	8x 01 04 61 02 FF	Mirror Image ON/OFF
	Off	8x 01 04 61 03 FF	
CAM_Freeze	On	8x 01 04 62 02 FF	Freeze Picture ON/OFF
	Off	8x 01 04 62 03 FF	
CAM_PictureFlip	On	8x 01 04 66 02 FF	Picture Reverse On/Off (Rotate 180º)
	Off	8x 01 04 66 03 FF	

Command	Command Setting	Command Packet	Comments
CAM_ICR	Night	8x 01 04 01 02 FF	ICR Mode ON/OFF
	Day	8x 01 04 01 03 FF	
	Auto (D&N mode only)	8x 01 04 51 02 FF	ICR is changed automaticaly by AGC Gain
	Ext-In	8x 01 04 51 05 FF	ICR is changed by external input
	Threshold (Auto)	8x 01 04 21 00 00 0p 0q FF	pq : Trheshold level of Auto mode (0 ~ 1Ch)
	Gap (Auto)	8x 01 04 21 10 00 00 0p FF	pq : On/Off Threshold Gap of Auto mode (0 ~ 4)
	Threshold (Ext-in)	8x 01 04 21 40 00 0p 0q FF	pq : Trheshold level of Ext mode (0 ~ 7)
	Gap (Ext-in)	8x 01 04 21 50 00 00 0p FF	pq : On/Off Threshold Gap of Ext. mode (0 ~ 2)
	ANTI-SAT	8x 01 04 21 A0 00 0p 0q FF	pq : ANTI-SAT level (0 ~ 14h)
	Auto ICR Delay	8x 01 04 41 00 00 0p 0q FF	pq : Auto mode delay – 0 (0sec) ~ FFh (255sec)
	Ext-In Delay	8x 01 04 71 00 00 0p 0q FF	pq : Ext-In mode delay – 0(0sec) ~ FFh(255sec)
	Burst On	8x 01 04 72 02 FF	Burst On/Off
	Burst Off	8x 01 04 72 03 FF	
	IR Detection On	8x 01 04 6E 02 FF	IR Detection On/Off
	IR Detection Off	8x 01 04 6E 03 FF	
	IR Detection Level	8x 01 04 6E 10 0p FF	p : IR Detection Threshold Level (0 ~ 4h)
CAM_Stabilizer	On	8x 01 04 34 02 FF	Stabilizer ON/OFF/HOLD
	Off	8x 01 04 34 03 FF	
	Hold	8x 01 04 34 00 FF	
CAM_StabilizerFunc	Range	8x 01 04 54 00 0p FF	p : DIS Dzoom Range (0:10%, 1:20%, 2:30%)
	Filter	8x 01 04 54 10 0p FF	p : DIS Filter (0:Low, 1:Middle, 2:High)
	Auto Center	8x 01 04 54 20 0p FF	p : Auto centering mode (0:OFF, 1:Half, 2:Full)
CAM_MEMORY	Reset	8x 01 04 3F 00 0p FF	p : Memory number (0 ~ 8)
	Set	8x 01 04 3F 01 0p FF	
	Recall	8x 01 04 3F 02 0p FF	
CAM_CUSTOM	Reset	8x 01 04 3F 00 7F FF	Starts in this mode at Power On
	Set	8x 01 04 3F 01 7F FF	
	Recall	8x 01 04 3F 02 7F FF	
CAM_MemSave	Write	8x 01 04 23 0t 0p 0q 0r 0s FF	t : 00 ~ 07 (Address) Total 16Byte
CAM_Display	On	8x 01 04 15 02 FF	pqrs : 0000 ~ FFFFh (Data)
	Off	8x 01 04 15 03 FF	
	On/Off	8x 01 04 15 10 FF	
CAM_DispSel		8x 01 04 14 00 0p FF	Display Item : On(1)/Off(0) p : bit[0] - ID, bit[1] - Title, bit[2] - Zoom Position bit[3] - System Message (MD, Zoom Preset)
CAM_MultiLineTitle	Title Set1	8x 01 04 73 1L 00 nn 00 00 00 00 00 00 00 00 FF	L : Line Number (0 ~ Eh) nn : H-Position (0 ~ 27h)
	Title Set2	8x 01 04 73 2L mm nn pp qq rr ss tt uu vv ww FF	L : Line Number (0 ~ Eh) mnpqrstuvw : Set of characters (1 ~ 10)
	Title Set3	8x 01 04 73 3L mm nn pp qq rr ss tt uu vv ww FF	L : Line Number (0 ~ Eh) mnpqrstuvw : Set of characters (11~ 20)
	Title Clear	8x 01 04 74 1p FF	Title Set clear (p: 0 ~ Eh, Fh= all line)
	On	8x 01 04 74 2p FF	Title display On/Off (0 ~ Eh, Fh= all line)
	Off	8x 01 04 74 3p FF	

Command	Command Setting	Command Packet	Comments
CAM_MENUKey	Up	8x 01 04 16 01 FF	Operates OSD menu cursor Menu opens menu or selects menu item
	Down	8x 01 04 16 02 FF	
	Left	8x 01 04 16 04 FF	
	Right	8x 01 04 16 08 FF	
	Menu	8x 01 04 16 10 FF	
	ESC	8x 01 04 16 20 FF	
CAM_Use OSD	Display String	8x 01 05 10 xx yy cc ss "nnnnnnnnnnnnn" FF	xx : X position (0 ~ 27h) yy : Y Position (0 ~ Eh) cc : Color (Fixed, 07 : White) ss : NORMAL = 00 INVERSE = 01 BLINK = 02 "nnnnn…." : Display String (Max 26 char)
	Blue Screen	8x 01 05 20 0p FF	p : Blue Screen Display - 0(Off), 1(On)
	Screen Clear	8x 01 05 30 01 FF	Screen All clear
CAM_Mute	On	8x 01 04 75 02 FF	Mute On/Off
	Off	8x 01 04 75 03 FF	
	On/Off	8x 01 04 75 10 FF	
CAM_PrivacyZone	Display	8x 01 04 77 pp pp pp pp FF	Mask Display On/Off pppppppp : Mask Settings (0: OFF, 1: ON)
	SetMaskColor	8x 01 04 78 pp pp pp pp qq rr FF	pppppppp : Mask Color Settings qq : Color Setting when 0 is selected rr : Color Setting when 1 is selected
	Non_InterlockMask	8x 01 04 6F mm	mm : Non-Interlock Mask Number pp : X, qq : Y, rr : W, ss : H
CAM_KeyLock	Off	8x 01 04 17 02 FF	Key Lock On/Off
	On	8x 01 04 17 03 FF	
CAM_IDWrite		8x 01 04 22 0p 0q 0r 0s FF	pqrs : Camera ID（0000 ~ FFFFh)
CAM_MD	On	8x 01 04 1B 02 FF	Motion Detection On/Off
	Off	8x 01 04 1B 03 FF	
	Function Set	8x 01 04 1C 0m 0n 0p 0q 0r 0s FF	m : Display mode n : Detection Frame Set (bit[0]:1, bit[1]:2, bit[3]:3) pq : Threshold Level (00 ~ 14h) rs : Interval Time set (00 ~ FFh
	Window Set	8x 01 04 1D 0m 0p 0q 0r 0s FF	m : Select Detection Frame Number (0,1,2) p : Start Horizontal Position (00 ~ 0Eh) q : Start Vertical Position (00 ~ 07) r : End Horizontal Position (01 ~ 0Fh) s : End Vertical Position (01 ~ 08h)
	Alarm(Reply)	y0 07 04 1B 0p FF	p : Detection Frame Number
CAM_RegisterValue		8x 01 04 24 mm 0p 0q FF	mm : Register No. (00, 52h, 60h, 72h, 73h, 90h,91h,9Ah) pq : Register Value

VISCA Inquiry Command List

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_DZoomModeInq	8x 09 04 06 FF	y0 50 02 FF	D-Zoom On
		y0 50 03 FF	D-Zoom Off
CAM_DZoomPosInq	8x 09 04 46 FF	y0 50 00 00 0p 0q FF	pq : D-Zoom Position
CAM_CompScanThrsInq	8x 01 04 19 03 FF	y0 50 00 00 0p 0q FF	pq : White spot compensation Threshold (0~FFh)
CAM_WBModeInq	8x 09 04 35 FF	y0 50 00 FF	Auto
		y0 50 01 FF	Indoor
		y0 50 02 FF	Outdoor
		y0 50 03 FF	One Push AWB
		y0 50 05 FF	Manual
CAM_RGainInq	8x 09 04 43 FF	y0 50 00 00 0p 0q FF	pq : R Gain (0~14h)
CAM_BGainInq	8x 09 04 44 FF	y0 50 00 00 0p 0q FF	pq : B Gain (0~14h)
CAM_ChromaInq	8x 09 04 13 FF	y0 50 00 00 0p 0q FF	pq : Chroma level (0~14h)
CAM_LensModeInq	8x 09 04 49 01 FF	y0 50 00 00 0p 00 FF	p : Lens Mode (0 : Normal, 1 : Deblur)
CAM_ShutterModeInq	8x 09 04 39 FF	y0 50 00 FF	Auto
		y0 50 03 FF	Manual
CAM_ShutterPosInq	8x 09 04 4A FF	y0 50 00 00 0p 0q FF	pq : Shutter Position
CAM_SlowShutterModeInq	8x 09 04 5A FF	y0 50 02 FF	Auto
		y0 50 03 FF	Off
CAM_MaxDSSLevInq	8x 09 04 5A 10 FF	y0 50 0p FF	p :Max Slow shutter level (0:x2, 1:x4, 2:x8) ※ You can't select “x8” in 30 or 25 fps mode
CAM_AGCModeInq	8x 09 04 5C FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ExpCompModeInq	8x 09 04 3E FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ExpCompPosInq	8x 09 04 4E FF	y0 50 00 00 0p 0q FF	pq : ExpComp Position
CAM_FlickerlessInq	8x 09 04 7A FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_BLCModeInq	8x 09 04 33 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_BLCAreaInq	8x 09 04 3C 00 FF	y0 50 0p FF	p : BLC Mode – 0 (AREA OSD Off), 1 (AREA OSD On)
CAM_BLC_StartXInq	8x 09 04 3C 10 FF	y0 50 00 00 0p 0q FF	pq : Start Horizontal Position (0 ~ 36h)
CAM_BLC_StartYInq	8x 09 04 3C 20 FF	y0 50 00 00 0p 0q FF	pq : Start Vertical Position (0 ~ 3Ch)
CAM_BLC_EndXInq	8x 09 04 3C 30 FF	y0 50 00 00 0p 0q FF	pq : End Horizontal Position (4~3Ah)
CAM_BLC_EndYInq	8x 09 04 3C 40 FF	y0 50 00 00 0p 0q FF	pq : End Vertical Position (4~40h)
CAM_HLCModeInq	8x 09 04 32 00 FF	y0 50 0p FF	p : HLC Mode - 0(Off), 1(On), 2(Night)
CAM_HLCLevelInq	8x 09 04 32 10 FF	y0 50 00 00 0p 0q FF	pq : HLC Level (0 ~ 14h)
CAM_HLCColorInq	8x 09 04 32 30 FF	y0 50 0p FF	p : HLC Color - 0 ~ Dh (0:BLK, 1~6:Gray1~6, 7:WHT, 8:RED, 9:GRN, Ah:BLU, Bh:CYN, Ch:YEL, Dh:MAG)
CAM_WDModeInq	8x 09 04 3D FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_WDLevelInq	8x 09 04 7D FF	y0 50 0p FF	p : WDR Level (0 ~ 4)

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_ACEInq	8x 01 04 1A FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ACELevelInq	8x 09 04 1A 10 FF	y0 50 0p FF	p : ACE Level (0 ~ 2)
CAM_DefogInq	8x 09 04 65 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_DefogLevelInq	8x 09 04 65 10 FF	y0 50 0p FF	p : Defog Level (0 ~ 2)
CAM_DefogModeInq	8x 09 04 65 20 FF	y0 50 0p FF	p : Defog Mode - 0(Manual), 1(Auto)
CAM_DNRModeInq	8x 09 04 53 FF	y0 50 0p FF	p : 0 (Off), 1 ~ 3 (Manual Level), 4 (Auto)
CAM_GammaInq	8x 09 04 5B FF	y0 50 0p FF	p: Gamma setting (0:0.45, 1:0.55, 2:0.65, 3:0.75)
CAM_ApertureInq	8x 09 04 42 FF	y0 50 00 00 0p 0q FF	pq: Aperture Gain (0 ~ Ah)
CAM_LR_ReverseModeInq	8x 09 04 61 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_FreezeModeInq	8x 09 04 62 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_PictureFlipModeInq	8x 09 04 66 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ICRStateInq	8x 09 04 01 FF	y0 50 02 FF	Night
		y0 50 03 FF	Day
CAM_ICRModeInq	8x 09 04 51 FF	y0 50 02 FF	Night
		y0 50 03 FF	Day
		y0 50 04 FF	ICR is changed automaticaly by AGC Gain
		y0 50 06 FF	ICR is changed by external input
CAM_ICRThresholdInq(Auto)	8x 09 04 21 FF	y0 50 00 00 0p 0q FF	pq : Trheshold level of Auto Mode (0 ~ 1Ch)
CAM_ICRGapInq(Auto)	8x 09 04 21 10 FF	y0 50 0p FF	p : On/Off Threshold Gap of Auto mode (0 ~ 4)
CAM_ICRThresholdInq(Ext)	8x 09 04 21 40 FF	y0 50 00 00 0p 0q FF	pq : Trheshold level of Ext Mode (0 ~ 7)
CAM_ICRGapInq(Ext)	8x 09 04 21 50 FF	y0 50 0p FF	p : On/Off Threshold Gap of Ext mode(0 ~ 2)
CAM_ICRANTI-SATInq	8x 09 04 21 A0 FF	y0 50 00 00 0p 0q FF	pq : ANTI-SAT level (0 ~ 14h)
CAM_AutoICRDelayInq	8x 09 04 41 FF	y0 50 00 00 0p 0q FF	pq : Auto mode delay - 0(0sec)~FFh(255sec)
CAM_Ext-InICRDelayInq	8x 09 04 71 FF	y0 50 00 00 0p 0q FF	pq : Ext-In mode delay - 0(0sec)~FFh(255sec)
CAM_BurstInq	8x 09 04 72 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_IRDetectionInq	8x 09 04 6E FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_IRDetectionLevelInq	8x 09 04 6E 10 FF	y0 50 0p FF	p : IR Detection Threshold Level (0 ~ 4)
CAM_StabilizerModeInq	8x 09 04 34 FF	y0 05 02 FF	On
		y0 05 03 FF	Off
		y0 05 00 FF	Hold
CAM_StabilizerRangeInq	8x 09 04 54 00 FF	y0 50 0p FF	p : DIS Dzoom Range (0:10%, 1:20%, 2:30%)
CAM_StabilizerFilterInq	8x 09 04 54 10 FF	y0 50 0p FF	p : DIS Filter (0:Low, 1:Middle, 2:High)
CAM_StabilizerAutoCInq	8x 09 04 54 20 FF	y0 50 0p FF	p : Auto centering mode (0:OFF, 1:Half, 2:Full)
CAM_MemoryInq	8x 09 04 3F FF	y0 50 0p FF	p: Last Recall Memory No.

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_MemSaveInq	8x 09 04 23 0t FF	y0 50 0p 0q 0r 0s FF	t : 0 ~ 7 (Address) pqrs : 0000 ~ FFFFh (Data)
CAM_DisplayInq	8x 09 04 15 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_DispSelInq	8x 09 04 14 00 FF	y0 50 0p FF	Display Item On(1)/Off(0) p : bit[0] - ID, bit[1] - Title, bit[2] - Zoom Position, bit[3] - System Message
CAM_TitleDisplayModeInq	8x 09 04 74 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_MenuModeInq	8x 09 04 16 FF	y0 50 02 FF	OSD menu On
		y0 50 03 FF	OSD menu Off
CAM_BlueScreenModeInq	8x 09 05 20 FF	y0 50 0p FF	p : Blue Screen Display - 0(Off), 1(On)
CAM_MuteModeInq	8x 09 04 75 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_PrivacyPosInq	8x 09 04 76 mm FF	y0 50 0n 0p 0p 0r 0r 0s 0s FF	mm : Mask Number n : 0(Non-interlock Mode), 1(Interlock Mode) pp : X, qq : Y, rr : W, ss : H
CAM_PrivacyDisplayInq	8x 09 04 77 FF	y0 50 pp pp pp pp FF	pppppppp : Mask Display (0: OFF, 1: ON)
CAM_PrivacyColorInq	8x 09 04 78 FF	y0 50 pp pp pp pp qq rr FF	pppppppp : Mask Color Setting qq : Color Setting when 0 is selected Rr : Color Setting when 1 is selected
CAM_PrivacyMonitorInq	8x 09 04 6F FF	y0 50 pp pp pp pp FF	pppppppp : Mask is displayed now
CAM_KeyLockInq	8x 09 04 17 FF	y0 50 02 FF	On
		y0 50 00 FF	Off
CAM_IDInq	8x 09 04 22 FF	y0 50 0p 0q 0r 0s FF	pqrs: Camera ID
CAM_VersionInq	8x 09 00 02 FF	y0 50 00 20 mn pq rs tu vw FF	mnpq : Model Code (0466h) rstu : ROM version (0100h) vw : Socket Number (3)
CAM_ModelInq	8x 09 00 37 FF	y0 50 pp pp pp qq qq FF	pppppp : Model Code *MM-18-32 : YY4C3Ch (YY : Custom. Code, standard model = 00) qqqq : Version
CAM_MDModeInq	8x 09 04 1B FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_MDFunctionInq	8x 09 04 1C FF	y0 50 0m 0n 0p 0q 0r 0s FF	m : Display mode n : Detection Frame Set (bit[0]:1, bit[1]:2, bit[3]:3) pq : Threshold Level (00 ~ 14h) rs : Interval Time set (00 ~ FFh)
CAM_MDWindowInq	8x 09 04 1D 0m FF	y0 50 0p 0q 0r 0s FF	m : Select Detection Frame Number (0,1,2) p : Start Horizontal Position (00 ~ 0Eh) q : Start Vertical Position (00 ~ 07) r : Stop Horizontal Position (01 ~ 0Fh) s : Stop Vertical Position (01 ~ 08h)
CAM_RegisterValueInq	8x 09 04 24 mm FF	y0 50 0p 0p FF	mm : Register No. (00, 52h, 60h, 72h, 73h, 90h,91h,9Ah) pp : Register Value

Exposure control values

Shutter Speed (Hex)

Step (Hex)	60Hz/30Hz /NTSC	50Hz/25Hz /PAL
0D	1/30000	1/30000
0C	1/10000	1/10000
0B	1/7000	1/7000
0A	1/5000	1/5000
9	1/2500	1/2500
8	1/1600	1/1600
7	1/1000	1/1000
6	1/700	1/700
5	1/250	1/250
4	1/120	1/100
3	1/60	1/50
2	1/30	1/25
1	1/15	1/12
0	1/8	1/6

D-Zoom control values

D-Zoom: Separate Mode

Magnification	Zoom Position
x1	00
x2	80
x3	AA
x4	C0
x5	CC
x6	D5
x7	DB
x8	E0
x9	E3
x10	E6
x11	E8
x12	EB
x13	ED
x14	EE
x15	EF
x16	F0
x17	F1
x18	F2
x19	F3
x21	F4
x23	F5
x25	F6
x28	F7
x32	F8

OSD character values

V position	00 ~ 0Eh	15 Rows
H position	00 ~ 27h	40 Columns

Character code:

Code	Character	Code	Character	Code	Character	Code	Character
00	Space	21	A	42	b	63	Ç
01	!	22	B	43	c	64	È
02	"	23	C	44	d	65	É
03	#	24	D	45	e	66	Ê
04	$	25	E	46	f	67	Ë
05	%	26	F	47	g	68	Î
06	&	27	G	48	h	69	Ï
07		28	H	49	i	6A	Ñ
08	(	29	I	4A	j	6B	Ô
09	)	2A	J	4B	k	6C	Ö
0A	*	2B	K	4C	l	6D	Ù
0B	+	2C	L	4D	m	6E	Û
0C	,	2D	M	4E	n	6F	Ü
0D	-	2E	N	4F	o	70	ß
0E	.	2F	O	50	p	71	à
0F	/	30	P	51	q	72	â
10	0	31	Q	52	r	73	ä
11	1	32	R	53	s	74	ç
12	2	33	S	54	t	75	è
13	3	34	T	55	u	76	é
14	4	35	U	56	v	77	ê
15	5	36	V	57	w	78	ë
16	6	37	W	58	x	79	î
17	7	38	X	59	y	7A	ï
18	8	39	Y	5A	z	7B	ñ
19	9	3A	Z	5B	{	7C	ô
1A	:	3B	[	5C	|	7D	ö
1B	;	3C	\	5D	}	7E	ù
1C	<	3D	]	5E	~	7F	û
1D	=	3E	^	5F		80	ü
1E	>	3F	_	60	À	81	Œ
1F	?	40	`	61	Â	82	œ
20	@	41	a	62	Ä		

Register Settings

Function	Register No.	Register Value	Setting
BaudRate	00	10	2400 bps
		11	4800 bps
		00	9600 bps
		01	19200 bps
		02	38400 bps
		03	57600 bps
		04	115200 bps
Digital ZOOM Max	52	00 ~ F8	Max. DZoom Ratio = 256 / (256 - Value)
Language	60	00	English
		01	Japanese
		03	Simplified Chinese
		05	Traditional Chinese
Monitoring Mode	72	06	1080p/30fps
		08	1080p/25fps
		09	720p/60fps
		0C	720p/50fps
		0E	720p/30fps
		11	720p/25fps
Output Enabling	73	02	Analog output disabled
		03	Analog output enabled
Image range mode	90	0	Full mode
		1	Comp mode
		2	User mode
Image range custom level	91	0 ~ 20	
EX-SDI mode	9A	0	Off
		1	On

Other Control Values

Setting	Value Range
R Gain	00 ~ 14h
B Gain	00 ~ 14h
Aperture Level	00 ~ 0Ah
Threshold Level of ICR	00 ~ 1Ch
Gap Level of ICR	00 ~ 04h

OSD Menu

◆ Main Menu

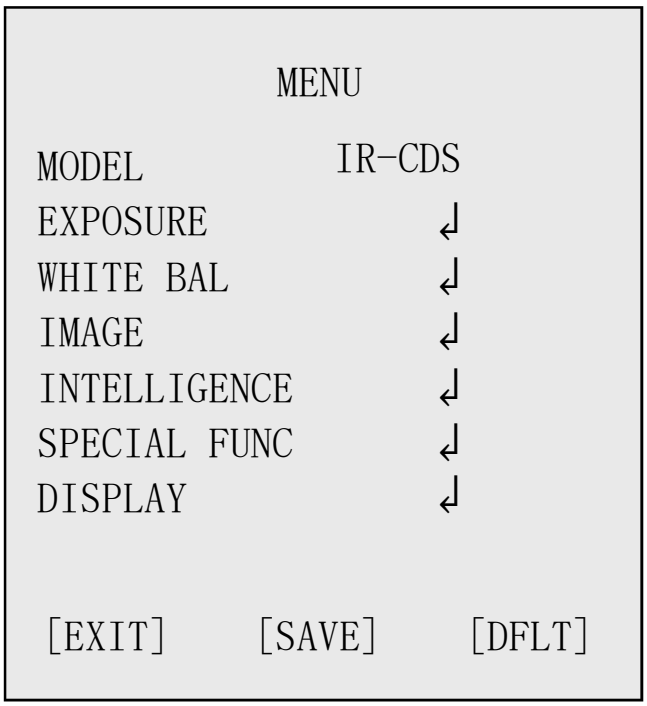

Functions can be setup using “Menu Key Command” of Visca protocol. The menu consists of the “Main Menu” and “Sub Menu”.
The main menu is displayed where 7 camera functions can be selected. To the push of each main menu selection, the sub-menu is displayed.

If you want to save the menu, select [SAVE].
If you don’t want to save the menu, select [EXIT] (After select, Power off -> on)
If you want default the menu, select [DFLT]

◆ Model

◈ MODEL: Select model

▶ D&N / IR-CDS

◆ EXPOSURE

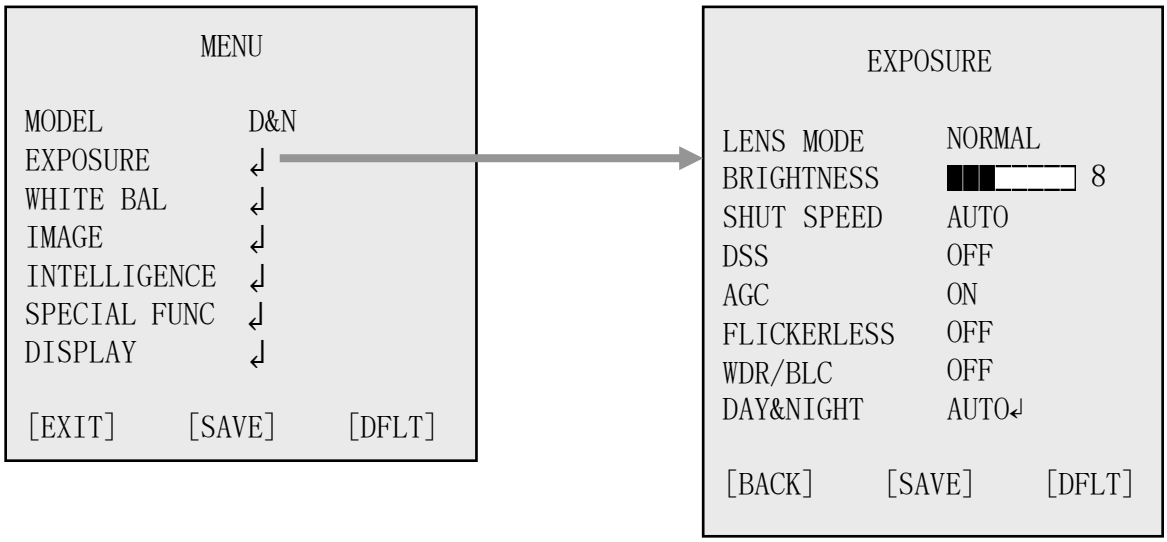

◈ LENS MODE: Select Lens Mode

▶ NORMAL / DEBLUR

◈ BRIGHTNESS: Adjust brightness level

▶ 0 (dark) ~ 20 (bright) steps

◈ SHUT SPEED: Can be set in AUTO or MANUAL mode

▶ AUTO / MANUAL↲

* 60 / 50 fps mode

▶ x8, x4, x2, 1/60(50), 1/120(100), 1/250, 1/700, 1/1000, 1/1600, 1/2500, 1/5000, 1/7000, 1/10000, 1/30000 sec

* 30 / 25 fps mode

▶ x4, x2, 1/30(25), 1/60(50), 1/120(100), 1/250, 1/700, 1/1000, 1/1600, 1/2500, 1/5000, 1/7000, 1/10000, 1/30000 sec

◈ DSS: Select maximum DSS (Digital Slow Shutter)

* 60 / 50 fps mode

▶ OFF / x2, x4, x8

* 30 / 25 fps mode

▶ OFF / x2, x4

◈ FLICKERLESS: Select Flickerless mode
▶ OFF / ON (remove screen flicker)

◈ AGC: Select Auto Gain Control
▶ OFF / ON

◈ WDR/BLC: Select WDR (Wide Dynamic Range) or BLC (Back Light compensation)
▶ WDR↲
▷ LEVEL: Adjust WDR level.
▶ LOW, MID-LOW, MIDDLE, MID-HIGH, HIGH
※ WDR doesn't work in Shutter Manual Mode.
※ When WDR on, CVBS output is disabled.
▶ BLC↲
▷ POSITION: Adjust the window position
▷ SIZE: Adjust the window size
※ Can't use WDR and BLC at the same time.
(When WDR On, BLC is Off. and when BLC is On, WDR is Off)

◈ DAY&NIGHT: Select Day&Night
▶ MODE: AUTO↲ / EXT-IN↲/ DAY / NIGHT↲
▷ AUTO
▶ DELAY: 0 ~ 255 sec
▶ THRS: 0 ~ 28
Day↔Night switching level in Auto Mode.
Switching in lower lux with lower threshold level.
▶ GAP: LOW, MID-LOW, MIDDLE, MID-HIGH, HIGH
Margin between Day→Night switching level and Night→Day switching level.
▶ IR DETECTION: Setting IR Detection mode. (ON / OFF)
▶ IR DET LEVEL: Setting IR Detection level.
(LOW, MID-LOW, MIDDLE, MID-HIGH, HIGH)
▶ ANTI-SAT: LED saturation improves. (0~20)
▶ BURST: OFF / ON

▷ EXT-IN / AUTO
※ When using AUTO↲ mode of IR-CDS model.
※ When using EXT-IN↲ mode of D&N model.
▶ DELAY: 0 ~ 255 sec
▶ ANTI-SAT: LED saturation improves. (0~20)
▶ BURST: OFF / ON
▶ POLARITY: External Input polarity (ACTIVE LOW / ACTIVE HIGH)

▷ NIGHT
▶ ANTI-SAT: LED saturation improves. (0~20)
▶ BURST: OFF / ON

◆ WHITE BALANCE

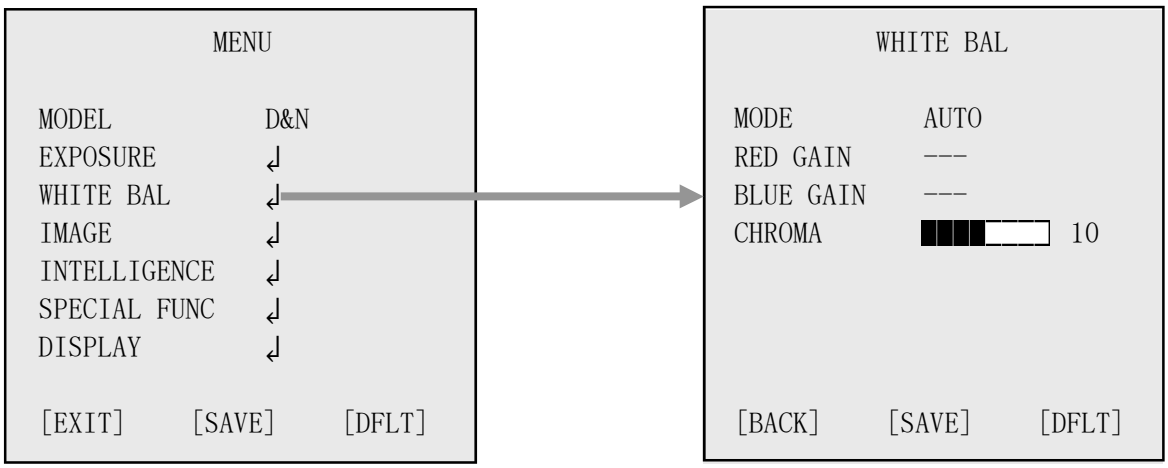

◈ AWB: Select WHITE BALANCE mode

▶ AUTO / ONE PUSH↲ / MANUAL / INDOOR /OUTDOOR

▷ AUTO: Automatically adjusts color according to the available lighting.

▷ ONE PUSH: It is a fixed white balance mode that may be automatically readjusted only by pressing ONE PUSH

▷ MANUAL↲: Color can be corrected when the user increases or decreases “RED GAIN” or “BLUE GAIN”.

▷ INDOOR: Set color temperature to be Indoor light (3700°K)

▷ OUTDOOR: Set color temperature to be Outdoor light (5100°K)

◈RED GAIN: Adjust R gain value

▶ 0 ~ 20 steps

◈BLUE GAIN: Adjust B gain value

▶ 0 ~ 20 steps

◈ CHROMA: Adjust CHROMA gain value

▶ 0 ~ 20 steps

◆ IMAGE

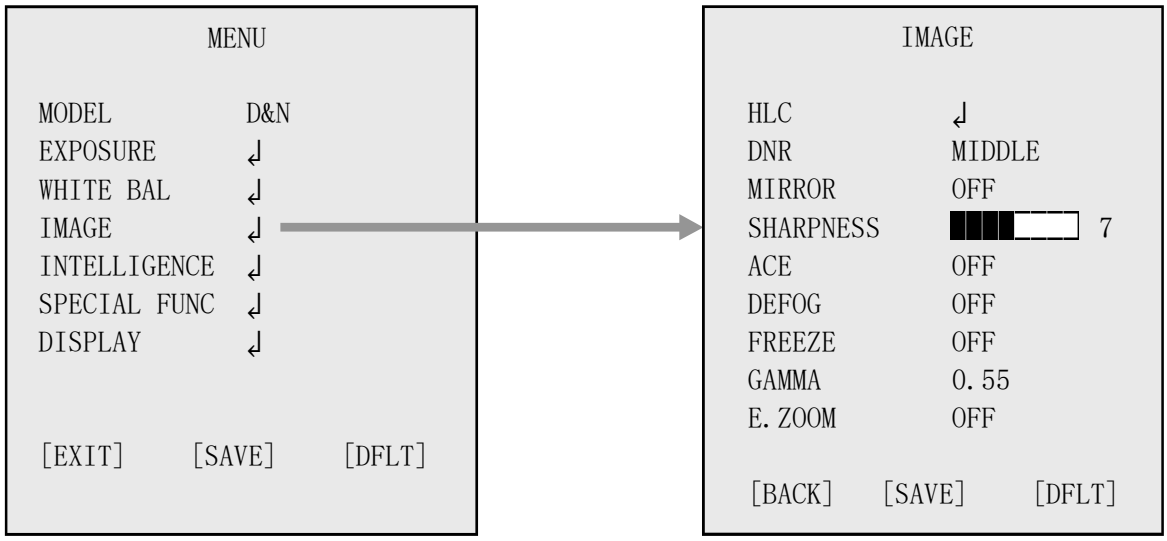

◈ HLC: Select High Light Compensation.
When extremely bright light is projected to the camera, masking is used on the portion to prevent partial saturation on the monitor.

▷ MODE: OFF / ON / NIGHT

▷ LEVEL: 0 ~ 20 steps

▷ COLOR: 0 ~ 13 steps

◈ DNR: Select Digital Noise Reduction

▶ OFF / LOW / MIDDLE / HIGH / AUTO

◈ MIRROR: Select a flip mode

▶ OFF / H / V / H&V

▷ H: You can flip the picture horizontally on the screen

▷ V: You can flip the picture vertically on the screen

▷ H&V: You can flip the picture horizontally & vertically on the screen

◈ SHARPNESS: Adjust sharpness level

▶ 0 ~ 10 steps

◈ ACE: Select Adaptive Contrast Enhancement (Digital Wide Dynamic Range)

▶ OFF / LOW / MIDDLE / HIGH

◈ DEFOG: Carry out defog function

▶ OFF / ON↲

▷ MODE: AUTO / MANUAL

▷ LEVEL: LOW / MIDDLE / HIGH

※ Can't use DEFOG and ACE at the same time
(When ACE On, DEFOG is Off, and when DEFOG is On, ACE is Off)

◈ FREEZE: Select real or still mode

▶ OFF / ON

◈ GAMMA: Select GAMMA

▶ 0.45 / 0.55 / 0.65 / 0.75

◈ E.ZOOM (Digital zoom)

▶ OFF / ON↲

▷ LIMIT: Max x2 ~ x19, x21, x23, x25, x28, x32

▷ POSITION: Select digital zoom magnification.

◆ INTELLIGENCE

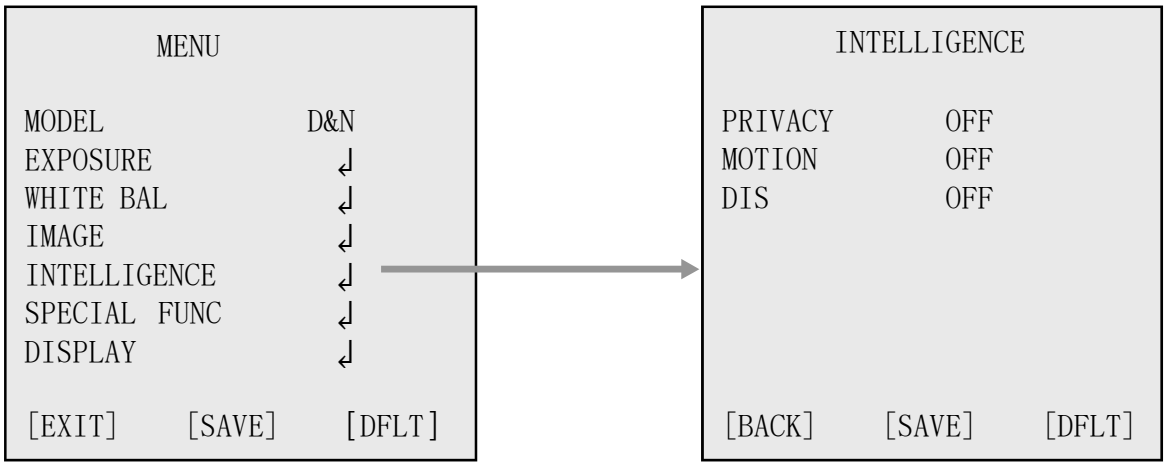

◈ PRIVACY: Hide an area you want to hide on the screen

▶ OFF / ON↲

▷ MASK#: Select mask area number (1 ~ 24)

▷ MODE: Mask enable or disable (OFF / ON)

▷ POSITION: Adjust the mask position

▷ SIZE: Adjust the mask size

▷ COLOR: Select mask color (0 ~ 13)

▷ TRANS: Select mask transparency level (0 ~ 4)

◈ MOTION: When there is movement of the subject in the screen, there will be an motion detection

▶ OFF / ON↲

▷ AREA#: Setting 3 areas(1~3) of motion detection

▷ MODE: OFF / ON (Limit and define areas of motion detection)

▷ SENSITIVITY: Adjust sensitivity of MD (0 ~ 20 steps)
More sensitive to setting to low step with sensitivity

▷ POSITION: Adjust the Area position

▷ SIZE: Adjust the Area size

▷ INTERVAL: Select the alarm interval time (0 ~ 255sec)

▷ DWELL TIME: Select the duration time about changing MD mode (0 ~ 255sec)

◈ DIS: Select Digital Image Stabilizer mode

▶ OFF / ON↲

▷ RANGE: Setting the image compensation range. (10%, 20%, 30%)

▷ FILTER: Setting the sensitivity to hold DIS function in worst case. (LOW, MIDDLE, HIGH)

▷ AUTO C: Setting Auto Centering mode (OFF, HALF, FULL)

◆ SPECIAL FUNC

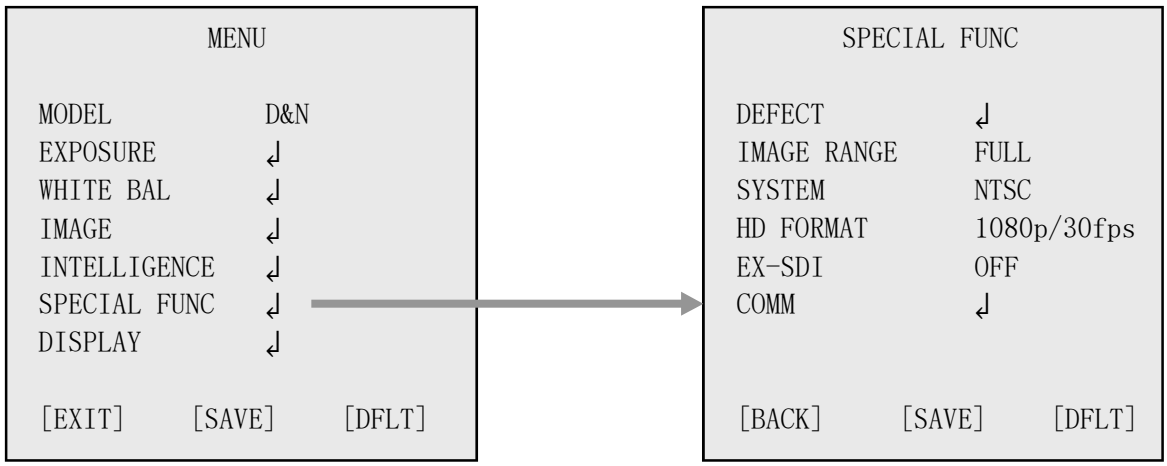

◈ DEFECT: Compensates for bad pixels that may occur. Occurs when the whole screen is in full black or if there is bad pixelation and it changes the THRS values until the screen is fixed.

※ When you use this function, the lens needs to be blocked from light getting into the lens.

◈ IMAGE RANGE: Select image bit range. (Full: 100%, Compressed: 75%)

▶ FULL, COMP, USER↲

▷ LEVEL: Select user mode level (0 ~ 32)

◈ SYSTEM: Select NTSC(30/60fps) or PAL(25/50fps).

◈ HD FORMAT: Select Digital output
(1080p/30(25)fps, 720p/30(25)fps, 720p/60(50)fps)

◈ EX-SDI: Select EX-SDI mode (OFF / ON)

◈ COMM: Set up the camera ID, baud rate, protocol

▷ ID: Select the camera ID

▶ 1 ~ 255

▷ BAUD RATE: Select serial communication speed

▶ 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200bps

▷ PROTOCOL: Select operating protocol

▶ VISCA / PELCO-D / PELCO-P / UPDATE

◆ DISPLAY

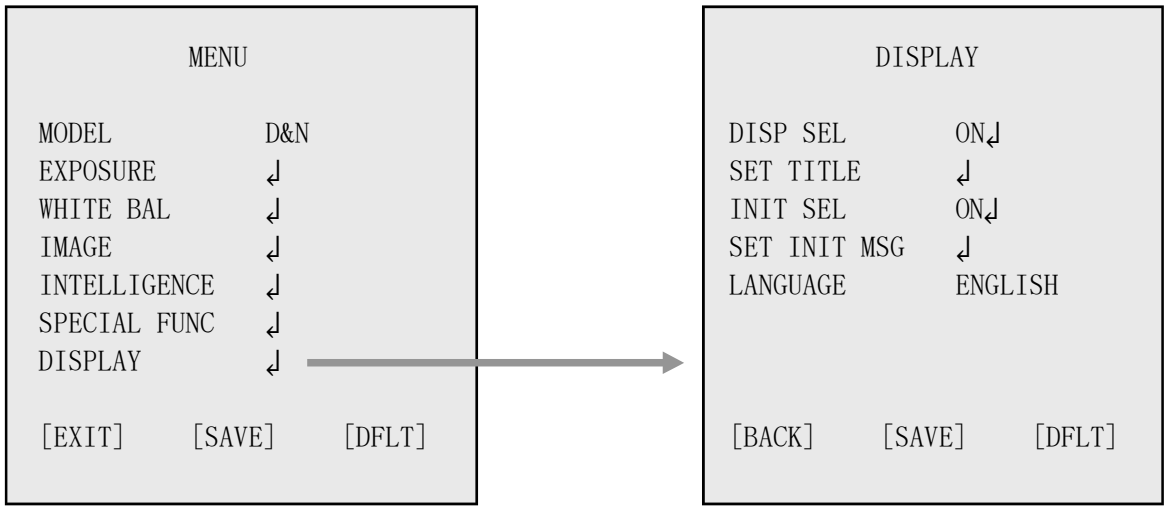

◈ DISP SEL: Select display item.

▶ OFF / ON↲

▷ ID: OFF / ON

▷ TITLE: OFF / ON

▷ ZOOM RATIO: OFF / ON

▷ SYSTEM MSG: OFF / ON (MD Alarm and Wait message)

◈ SET TITLE: Select camera title menu (Text edit– max 40 characters)

◈ INIT SEL: Select display initial message.

▶ OFF / ON↲

▷ ID: OFF / ON

▷ BAUDRATE: OFF / ON

▷ PROTOCOL: OFF / ON

▷ VERSION: OFF / ON

▷ INIT MSG: OFF / ON

◈ SET INIT MSG: modify initial message. (Text edit – max 40 characters)

◈ LANGUAGE: Select language.

▶ English / Simplified Chinese / Traditional Chinese / Japanese

※ Character Table of Text edit Mode

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

a b c d e f g h i j k l m n o p q r s t u v w x y z , .

( ) { } [ ] 0 1 2 3 4 5 6 7 8 9 * + - / = ~ ! ? " ‘

CAMERA DIMENSIONS

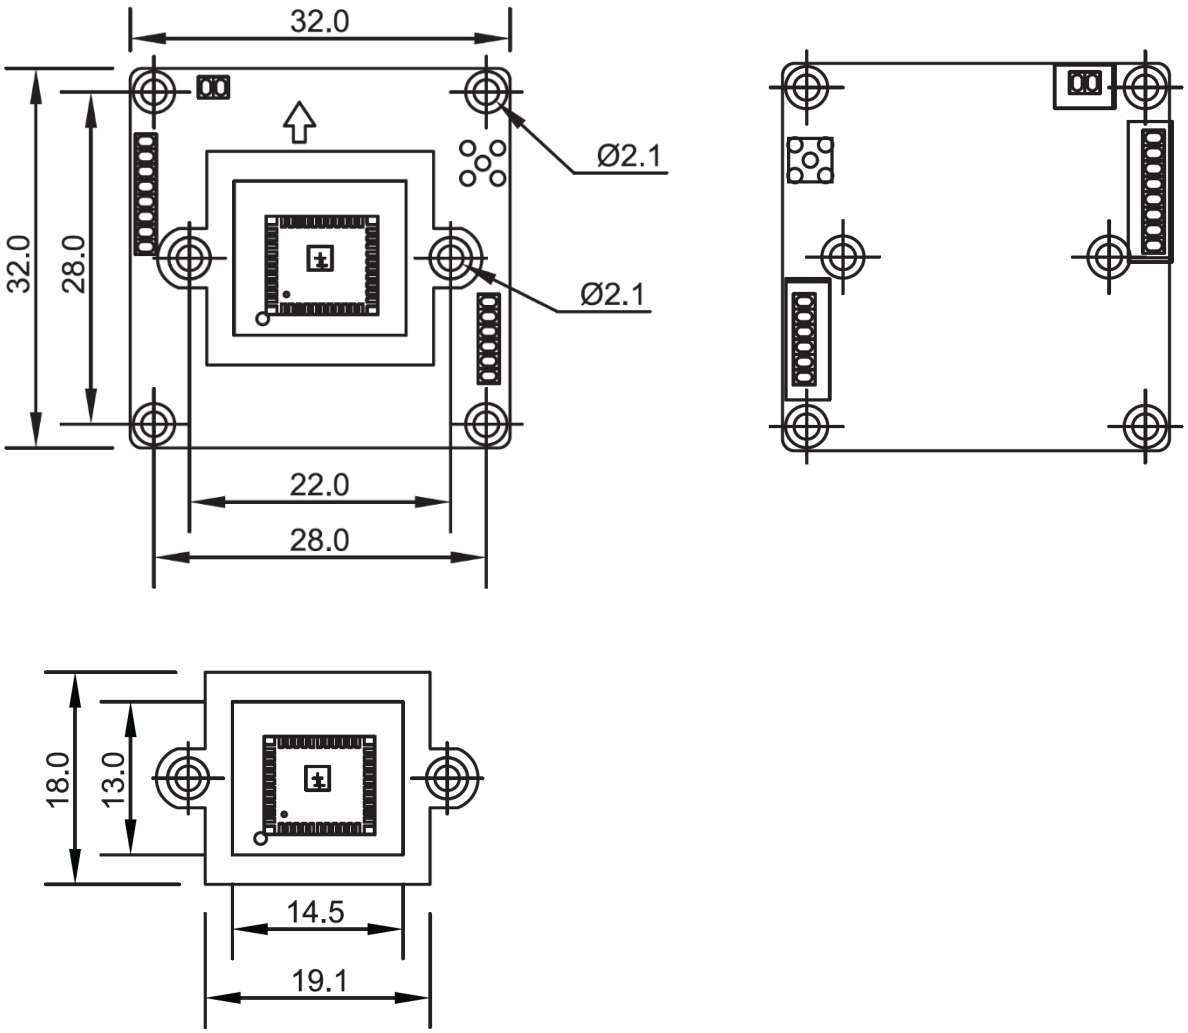

APPROVALS

Active Silicon makes the following approval statements:	
CE	In accordance with the CE Marking regulations, the **Oriole HD-SDI Board Camera** is not a finished product and is supplied for further integration into a finished product that will be CE marked by the final manufacturer/integrator. Therefore, no CE marking or Declaration of Conformity is required or allowed.
RoHS3	This product is compliant with the RoHS3 requirements (Directive 2015/863/EU).
REACH	Please contact Active Silicon for the latest formal REACH declaration (EC 1907/2006).
EMC	This product is designed to be compliant with the following requirements when housed in a suitable enclosure: • EN 55022:2010 (Class A) and EN 55024:2010 (EU Directive 2014/30/EU Electromagnetic Compatibility • FCC Rules for Class A digital devices

ORDERING INFORMATION

PART NUMBER	*DESCRIPTION*
AS-BCAM-S32-00-B	Oriole HD-SDI Board Camera (also EX-SDI, CVBS output), with switchable IR-cut filter and 3.6mm focal length M12 standard lens fitted; other lenses on request.
AS-BCAM-S32-EVAL-A	Evaluation kit for the Oriole HD-SDI Board Camera; contains power supply, multi-way evaluation cable and USB-serial communication cable.

Active Silicon
COMPUTER IMAGING PRODUCTS
A SOLID STATE PLC GROUP COMPANY

CONTACT DETAILS

Headquarters:

Active Silicon Ltd
Pinewood Mews, Bond Close, Iver,
Bucks, SL0 0NA, UK.

Tel: +44 (0)1753 650600
Fax: +44 (0)1753 651661
Email info@activesilicon.com
Website: www.activesilicon.com

North America:

Active Silicon, Inc.
479 Jumpers Hole Road, Suite 301,
Severna Park, MD 21146, USA.

Tel: +1 410-696-7642
Fax: +1 410-696-7643
Email: info@activesilicon.com
Website: www.activesilicon.com

01-Sep-2023 TRM BCAM-S32 (w Sep19 v0.03)